

UltraSpan* UST / USM

UST - pre-cured silicone transition sheet

USM - pre-cured silicone molded corners

Product Description

GE UST2200 transition sheet and USM corners are low modulus pre-cured silicone rubber accessories for flashing and transition applications in the GE Elemax* 100% silicone air & water-resistive barrier system.



Typical Performance Properties

Performance

- **Silicone Durability** – UST/USM Pre-cured silicone rubber exhibits excellent long-term resistance to natural weathering, including: ultraviolet radiation, high and low temperatures, rain and snow, with negligible change in elasticity.
- **UV Resistant** – May be left exposed indefinitely to UV.
- **Thermal Stability** – Remains elastic over a wide temperature range. Does not harden or become brittle under very cold conditions and does not soften or melt in high heat.
- **Flexible** – Low modulus UST/USM silicone rubber imparts low strain to moving substrate surfaces and maintains flexibility at transition areas and board joints.
- **Permeable** – Transition silicone is vapor permeable allowing the entire air & water barrier system to breathe, not just the coated wall areas.

Application

- **Silicone Compatibility** – Full chemical and adhesive compatibility with all GE AWB silicone sealants, liquid flashing, and coatings.
- **Contact Verification** – Product is currently available in translucent to allow easy visual confirmation of continuous sealant / liquid flashing contact.

Aesthetics

- **Product Offering** – UST/USM silicone rubber is available in multiple standard widths and shapes. Custom widths and shapes are also available.

GE is a registered trademark of General Electric Company and is under license by Momentive Performance Materials Inc.

*UltraSpan and Elemax are trademarks of Momentive Performance Materials Inc.



UltraSpan* UST / USM pre-cured silicone transition sheet & molded accessories

Basic Uses

UST2200 silicone strips / sheets are excellent products to consider for:

- Transitioning between differing and/or intersecting construction materials
- Flashing at rough openings, sheathing joints, terminations and adjacent materials
- Treating expansion joints and drift joints

USM silicone corners are excellent products to consider for:

- Protecting and sealing rough opening corners
- Creating flexible sill pans and end dams

Customer Evaluation

Customers must evaluate Momentive Performance Materials (MPM) products and make their own determination as to fitness of use in their particular applications.


Packaging

UST2200 silicone strips are currently available in 100 foot rolls. Standard widths are: 3", 6" and 12" (76 mm, 152 mm and 305 mm). Custom UST silicone sheets are currently available in flat sizes up to 48 inches (1220 mm) wide. Minimums apply.

USM silicone corners come 24 pieces per box.

Colors

UST2200 silicone strips and USM molded corners are currently available in translucent and black.

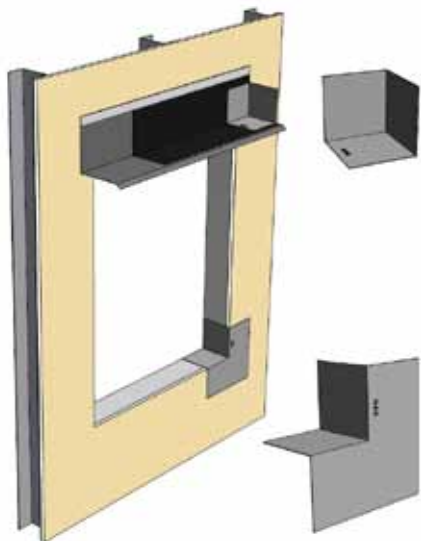

Typical Physical Properties

Typical physical property values of UltraSpan UST / USM pre-cured silicone transition sheet & molded accessories as supplied and cured are set forth in the tables below.

Typical Properties – Supplied

Property	Value	Test Method
Consistency	elastomeric silicone rubber	

Typical Properties – Cured

Property	Value ⁽¹⁾	Test Method
Hardness	35	ASTM D2240
Ultimate Tensile Strength	1103 psi (7.6 MPa)	ASTM D412
Ultimate Elongation	555%	ASTM D412
Permeance (UST)	6.42	ASTM E96
Tear Strength	70 pli	ASTM D624
Service Temperature Range	-55°F (-48°C) to +400°F (204°C)	

(1) Typical properties are average data and are not to be used as or to develop specifications.



Note: UST / USM silicone rubber is not recommended:

- Where frequent abrasion or physical abuse may be encountered or for below grade applications.

UltraSpan* UST / USM pre-cured silicone transition sheet & molded accessories

Installation

- UST/USM silicone rubber is not self-adhesive. These products are adhered to the assembly by embedding them into SilPruf* sealant, SWS*, or Elemax* 5000 Liquid Flashing, or in some cases (in-plane transitions only), with Elemax 2600 AWB coating.
- Staples may be used to assist in positioning the UST/USM silicone rubber in place, when applicable.
- UST/USM silicone rubber is easily cut or trimmed using scissors.

Surface Preparation

- Surfaces must be clean, dry and sound. For additional surface preparation information, refer to the technical data sheet of the sealant, liquid flashing, or coating being used to apply the UST/USM silicone rubber.

UST Transition Sheet

- Measure and cut the UST transition sheets into manageable lengths.
- Dry fit the UST transition sheet and trim if necessary while ensuring sufficient length for required bonding allowances.
 - **When using sealant / Elemax 5000 Liquid Flashing to adhere UST silicone sheets**, apply the sealant / liquid flashing and trowel thin to an area slightly larger than the UST silicone sheet to be bonded. Using hand pressure, seat the UST transition sheet into the sealant / liquid flashing immediately so it is applied before the sealant / liquid flashing begins to form a skin. Small adjustments to the UST silicone sheet may be made at this time, but complete lifting of the seated material and reapplying to the substrate should be avoided. Use a suitable roller to predominately embed the UST silicone sheet into the sealant / liquid flashing and work entrapped air out towards the edge to bond it into its final location. All edges of the UST silicone sheet must be firmly embedded in sealant/ liquid flashing. If necessary, apply additional sealant / liquid flashing to the edges of the UST silicone sheet, and trowel smooth.

- **When using Elemax 2600 AWB coating to adhere UST transition sheets**, apply a first coat by roller in sufficient width and slightly larger than the UST silicone sheet area to be bonded. Press UST silicone sheet(s) into the coating while still wet or tacky. Apply a second coat of Elemax 2600 AWB immediately over the UST silicone sheet to embed it into the first applied coat. Note: Only use Elemax 2600 AWB to bond UST silicone sheets on flat surfaces. When applying UST silicone transitions around or into corners, use sealants / liquid flashing as the adhesive.

USM Molded Corners

- Check for fit of pre-molded corners noting or marking extent of part in final position. Apply sealant / liquid flashing and trowel thin to an area slightly larger than the USM to be bonded. Using hand pressure seat the USM into the sealant / liquid flashing immediately so it is applied before the sealant / liquid flashing begins to form a skin. Small adjustments to the USM may be made at this time. Lap neighboring UST/USM silicone rubber 2" minimum and sequence installation of UST/USM silicone sheets to provide shingled laps.
- Apply a small amount of silicone sealant / liquid flashing to the edges of the USM and trowel smooth making sure that all edges are fully embedded with silicone sealant / liquid flashing.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.ge.com/silicones or, upon request, from any Momentive Performance Material representative. Use of other materials in conjunction with Momentive Performance Materials sealants products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products.

Location	Emergency Service Provider	Emergency Contact Number
Mainland U.S., Puerto Rico	CHEMTREC	1-800-424-9300
Alaska, Hawaii	CHEMTREC	1-800-424-9300
Canada	CHEMTREC	1-800-424-9300
Europe, Israel		
Middle East	NCEC	+44 (0) 1235239670
Asia Pacific (except China)	NCEC	+44 (0) 1235239671
China	NCEC	+44 (0) 1235239670
Latin America (except Brazil)	NCEC	+86-10-5100-3039
Brazil	NCEC	+44 (0) 1235239670
All other locations world wide		08000111767 or 08007071767
At sea	SOS Cotec	+44 (0) 1235239670
	NCEC	
	Radio U.S. Coast Guard in U.S. waters	
	NCEC in International waters	+44 (0) 1235239670

For Health related calls, contact Momentive Performance Materials at +1-518-233-2500 (English only).

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

UltraSpan* UST / USM pre-cured silicone transition sheet & molded accessories

CUSTOMER SERVICE CENTERS

North America

E cs-na.silicones@momentive.com

• Specialty Fluids	T +1.800.523.5862	F +1.304.746.1654
• UA, Silanes and Specialty Coatings	T +1.800.334.4674	F +1.304.746.1623
• RTVs and Elastomers	T +1.800.332.3390	F +1.304.746.1623
• Consumer Sealants & Construction Sealants and Adhesives	T +1.877.943.7325	F +1.304.746.1654

Latin America

E cs-la.silicones@momentive.com

• Argentina & Chile	T +54.11.4862.9544	F +54.11.4862.9544
• Brazil	T +55.11.4534.9650	F +55.11.4534.9660
• Mexico & Central America	T +52.55.2169.7670	F +52.55.2169.7699
• Venezuela, Ecuador, Peru Colombia & Caribbean	T +58.212.285.2149	F +58.212.285.2149

Europe, Middle East, Africa and India

E cs-eur.silicones@momentive.com

T +00.800.4321.1000

Pacific

E cs-ap.silicones@momentive.com

T +1.800.820.0202
T +0.81.276.20.6182

Worldwide Hotline

T +1.607.786.8131
T +1.800.295.2392

Visit us at www.ge.com/silicones

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right



is a trademark of General Electric Company and is used under license by Momentive Performance Materials Inc.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.

*UltraSpan, SilPruf, SWS and Elemax are trademarks of Momentive Performance Materials Inc.

Copyright 2016 Momentive Performance Materials Inc. All rights reserved.