

RGS7700 RapidStrength

Two component, fast curing silicone elastomeric adhesive

Product Description

RGS7700 silicone elastomeric adhesive is a two-component, 100% silicone neutral cure sealant that rapidly builds adhesive and elastomeric strength for bedding and glazing of glass in residential and commercial window designs.

Typical Performance Properties

Performance

- **Silicone Durability** – Cured silicone rubber exhibits excellent long-term resistance to natural weathering including: extreme temperatures, ultraviolet radiation, rain and snow, with negligible change in elasticity.
- **Adhesion Performance** – Attains strong bonds to many conventional construction materials without primer.
- **Structural Capability** – May be utilized as the sealant for structural glazing applications.

Application

- **Low Pumping Viscosity** – Can allow for high unit throughput, low strain on production pumping equipment, and void free filling of the sealant joint.
- **Quick Green Strength** – allows for movement of assemblies within minutes of application without silicone transfer or glass shifting.
- **Fast Cure** – May allow for shipping of finished assemblies within hours of completion without silicone transfer or glass shifting.
- **Non-flammable** – Does not require special handling or storage associated with flammable materials.
- **Compatibility** – Compatible with GE structural and weather sealing silicones as well as many commonly used accessories in the glass and glazing trade.

Basic Uses

RGS7700 is an excellent candidate to consider as bedding or glazing adhesive where fast green strength and cure speed facilitates movement of assemblies on high speed production lines.

Customer Evaluation

Customers must evaluate Momentive Performance Materials (MPM) products and make their own determination as to fitness of use in their particular applications.

RGS7700 is comprised of the following:

Base: white or beige paste in 55-gallon drums filled to a volume of 44.4 gallons (166.5 L) with a polyethylene liner.

Catalyst Packaging: tinted or translucent paste, supplied in 5 gallon pails containing 4.6 gallons (17.3 L) or 55 gallon steel open top drums containing 46.1 gallons (172.9 L).

- All components are sold separately and kit matching is not required.

Colors

- Curing Agent RGS7700B, Black (Yields Gray when mixed with RGS7700A)
- Curing Agent RGS7703B, Black (Yields Black when mixed with RGS7700A)
- Curing agent RGS7705B, Translucent (Yields White when mixed with RGS7700A)
- Curing agent RGS7705B, Translucent (Yields Beige when mixed with RGS7705A)
- For custom color availability, contact your MPM sales representative.

Applicable Standards

- RGS7700 meets the strength requirements of the ASTM C1184 Specification for Structural Sealants.
- RGS7700 meets AAMA 802.3-92, Type II, 805.2-95, Group C.
- RGS7700 passes ASTM C719 Standard Test Method for Adhesion and Cohesion of Elastomeric Joint Sealants Under Cyclic Movement (Hockman Cycle) at $\pm 50\%$.

GE is a registered trademark of General Electric Company and is under license by Momentive Performance Materials Inc. Momentive Performance Materials provides versatile materials as the starting point for its creative approach to ideas that help enable new developments across hundreds of industrial and consumer applications. We are helping customers solve product, process, and performance problems; our silanes, fluids, elastomers, sealants, resins, adhesives, urethane additives, and other specialty products are delivering innovation in everything from car engines to biomedical devices. From helping to develop safer tires and keeping electronics cooler, to improving the feel of lipstick and ensuring the reliability of adhesives, our technologies and enabling solutions are at the frontline of innovation.



RGS7700 RapidStrength two component, fast curing silicone elastomeric adhesive

Typical Properties

Uncured Properties	Base	RGS7700A
Color	Off White	Thixotropic Paste
Specific Gravity	1.35	–
Shelf Life	18 months ⁽¹⁾	–
Uncured Properties	Catalyst	RGS7700B
Color	Black	Thixotropic Paste
Specific Gravity	1.04	–
Shelf Life	12 months ⁽¹⁾	–

Mixed Compound Properties

RGS7700A+RGS7700B		
Color	Grey	Thixotropic Paste
Specific Gravity	1.19	Mixed at 10:1 volume
Mix Ratio Range	8:1 to 12:1	By volume
Snap Time	6-18 minutes	Depends on ratio, temp. & RH
Tack Free Time	2X snap time	Depends on ratio, temp. & RH
Consistency/Sag	<0.05"	Non-sagging

Cured Properties⁽²⁾

Full Cure at Standard Laboratory Conditions RGS7700A+RGS7700B @ 10:1 volume ratio		
Color	Grey	RGS7700B
Hardness Points (type A indenter)	28	ASTM D2240
Ult. Tensile Strength	230 psi (1.58 MPa)	ASTM D412
Ult. Elongation	280%	
Modulus @ 50% Elongation	50 psi (0.34 MPa)	ASTM D412
Modulus @ 100% Elongation	110 psi (0.76 MPa)	ASTM D412
Peel Strength	50 ppi (59 kg/cm)	ASTM C794
Green Strength Tensile	15 psi (0.10 MPa)	ASTM C1135
15 minute cure	100 psi (0.69 MPa)	
60 minute cure		
Movement Capability	±50%	
Accelerated Weathering, 5000 hours	Excellent, no degradation	ASTM C1369
Heat Resistance	300°F (149°C)	–

(1) When properly stored; see section on storage.

(2) Typical value, actual value may vary.

Precautions

Silicone setting blocks are recommended for direct contact with RGS7700. Avoid using non-silicone materials (i.e., EPDM, Neoprene) as they could degrade or discolor the RGS7700 seal over time. Compatibility testing is recommended on all materials that are to be in direct contact with RGS7700.


Technical Services

Additional technical information, literature, laboratory testing and application engineering may be available upon request from MPM. Any technical advice furnished by MPM or any representative of MPM concerning any use or application of any MPM product is believed to be reliable but MPM makes no warranty, expressed or implied, of suitability for use in any application for which such advice is furnished.

RGS7700 Volume to Weight Ratio Correlation*

Volume	Weight
8:1	10.4:1
9:1	11.7:1
10:1	13.0:1
11:1	14.3:1
12:1	15.6:1

*Calculated based on typical values. Reference certificate of analysis for calculation batch specific ratios.

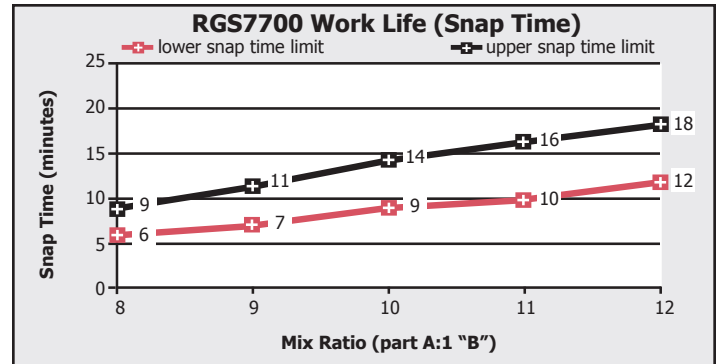

Limitations

- Although RGS7700 is not directly dependent on exposure to atmospheric moisture to cure, it requires ventilation to complete its cure and adhesion development by releasing its cure byproduct.
- RGS7700 should not be used in a completely sealed environment.
- It is not designed for continuous water immersion.
- RGS7700 provides primerless adhesion to a wide range of substrates, but variability in substrate composition and/or cleanliness can interfere with adhesion.
- The user is responsible for ensuring that the adhesion characteristics of RGS7700 to the user's substrates will meet his/her expectations.
- Structural glazing industry guidelines (ASTM C1401) suggest that drawings and details are to be reviewed by all parties involved in the manufacture of an SSG system and for each building project. RGS7700 should only be used in structural glazing applications that MPM has reviewed shop drawings and has performed adhesion and compatibility tests on project substrates and spacer materials. Review and testing is done on a project-by-project basis. No blanket approval is given by MPM for structural glazing applications.
- RGS7700 should not be used for structural adhesion on bare metals or surfaces subject to corrosion (i.e., mill aluminum, bare steel, etc.).
- RGS7700 is not intended for use in food contact applications.

RGS7700 RapidStrength two component, fast curing silicone elastomeric adhesive

General Guidelines

Mixing, Pumping and Dispensing

- RGS7700 should be mixed and dispensed using two-component mixing equipment. These mixing / pumping systems are specifically designed to meter precise proportions of A base and B catalyst, in a sealed environment, then mix and dispense material at the proper ratio, free of entrained air.
- When exchanging B catalyst on equipment, care should be taken to minimize exposure to the environment in order to prevent premature curing of the catalyst.
- RGS7700 is a suitable candidate for both 'in-line' mixing systems and "purgeless" after-the-gun mixing equipment. Consult equipment manufacturer and/or MPM for information on mixing device options.
- When properly mixed, the material should be a solid, homogeneous color free of any swirling or marbling of colors. If incomplete mixing is noticed, cease operation until equipment adjustments can be performed to ensure that complete mixing is being attained.

Quality Control Recommendations

- Upon receipt and prior to production, a sample of base (part A) and catalyst (part B) should be taken from each lot of material to be used, weighed to the desired A/B ratio, mixed and checked for proper curing before placing material into production. This procedure validates material performance separately from production equipment.
- A Quality Control program is highly recommended to aide in the assessment of proper and consistent mixing during operations. Daily snap time and butterfly testing should be performed at line start up and after material changes on equipment. Contact an MPM Technical Services representative for information on suggested Quality Control checks.
- Adhesion testing to production substrates should be included within the quality control program.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.ge.com/silicones or, upon request, from any Momentive Performance Material representative. Use of other materials in conjunction with Momentive Performance Materials sealants products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

RGS7700 RapidStrength two component, fast curing silicone elastomeric adhesive

CUSTOMER SERVICE CENTERS

Americas

+1 800 295 2392

+1 614 986 2495

Email: 4information@momentive.com

Europe, Middle East, Africa and India

+00 800 4321 1000

+40 212 534754

Email: 4information.eu@momentive.com

Asia Pacific

Japan

+81 276 20 6182

China

+800 820 0202

All APAC

+60 3 9206 1543

Email: 4information.ap@momentive.com

Visit us at www.ge.com/silicones

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.